

## Circular anti-ligature recessed LED downlighters

Circular recessed anti-ligature luminaires. Choice of clear or satin 4 mm thick polycarbonate diffuser secured via strong spun steel ring using tamper-resistant pin Torx screws. SmartScan Radar and maintained emergency versions available.

- Anti-pick sealant can be used to seal the mounting bezel whilst still allowing the luminaire to be removed for maintenance
- Cover secured using tamper-resistant T20 pin Torx screws
- Supplied with remote gear unit fitted with 2 m supply lead
- SmartScan Radar versions with sensor discretely hidden behind the cover



IP65 (IP20 above ceiling)

IK10

Up to 106.5 LL/CW

SMARTSCAN

LUXGUARD

### Specification

Mounting	Recessed	IP rating	IP65 (IP20 above ceiling)
Impact rating	IK10	Max presence detection height	4 m

### Lighting

Optic	Clear cover Satin cover	Lumen output	835 lm - 1,940 lm
Efficacy	Up to 106.5 LL/CW		

### Emergency data

Emergency lumen output	260 lm - 330 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power

LED power	8 W - 16 W	Circuit power	10 W - 19 W
-----------	------------	---------------	-------------




### LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	63 K - L80/B10		

### Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class C		

## Dimensions

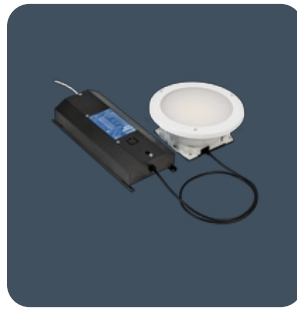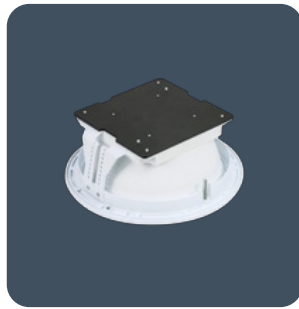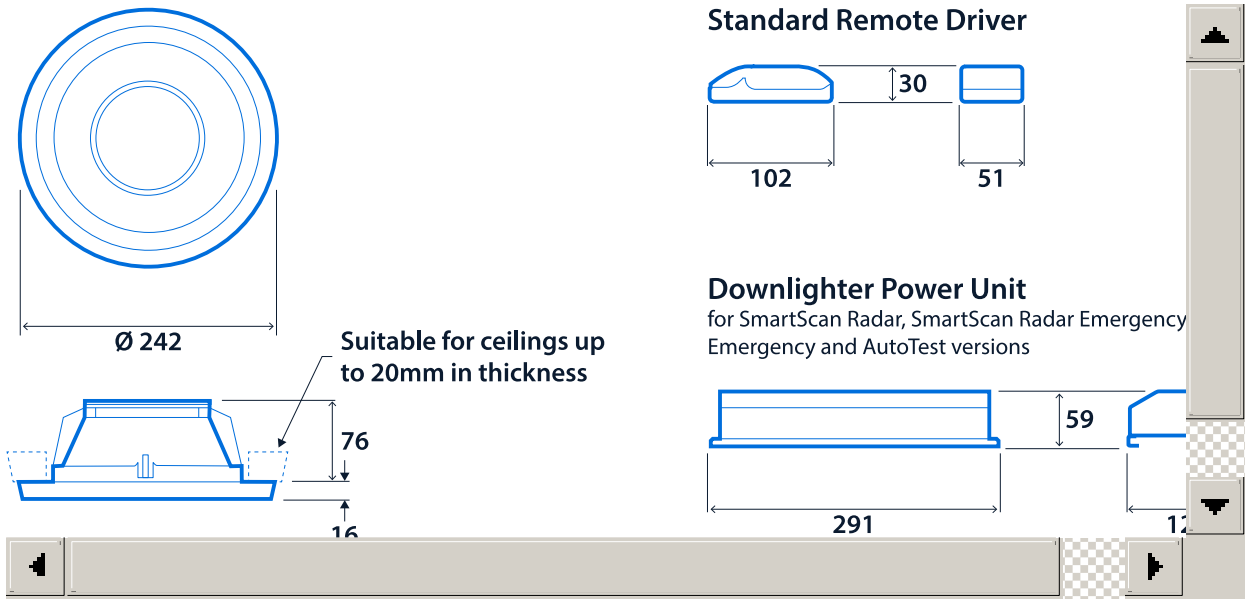

**Click or scan here**  
View G3 AL variants using our  
online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.