Prismalette



Vandal-resistant luminaires

Luminaires suitable for internal or external use. Strong high-pressure die-cast aluminium body with flame-retardant polycarbonate cover. Photocell, SmartScan Radar and maintained emergency versions available.

Applications: security areas, precincts, subways, passages and corridors.

- Tamper-resistant cover screws as standard
- Optional photocell control
- Optional bezel trim for semi-recessed mounting
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- Microwave presence detector option with stand-by light level feature
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Photocell options are not suitable for semi-recessed or cornice mounting



Maintained



340 lm - 380 lm

Specification

Mounting	Surface	IP rating	IP65
Impact rating	IK11	Max presence detection height	Up to 4 m

Lighting

Optic	Low profile satin cover	Lumen output	1,645 lm - 2,395 lm
	Satin cover		

Efficacy Up to 125.4 LL/CW

Emergency data

Emergency lumen output

. 5,		- 3 - 7 71 -	
Emergency duration	3 hours	Battery specification	Lithium Iron Phosphate (LiFePO4)
			Nickel Metal Hydride (NiMH)

Emergency type

Power

LED power 11 W - 16 W Circuit power 14 W - 20 W

LED characteristics

CNI	0U +	Colour temperature	4000 K

Rated life (hours) 100 K - L80/B10

Prismalette



Compliance

UKCA

۷۵٥

CE


Energy efficiency class

This product contains a light source of MOD compliance energy efficiency class B

Yes

JSP482 Chapter 8 Document for 'Category C' areas

Dimensions

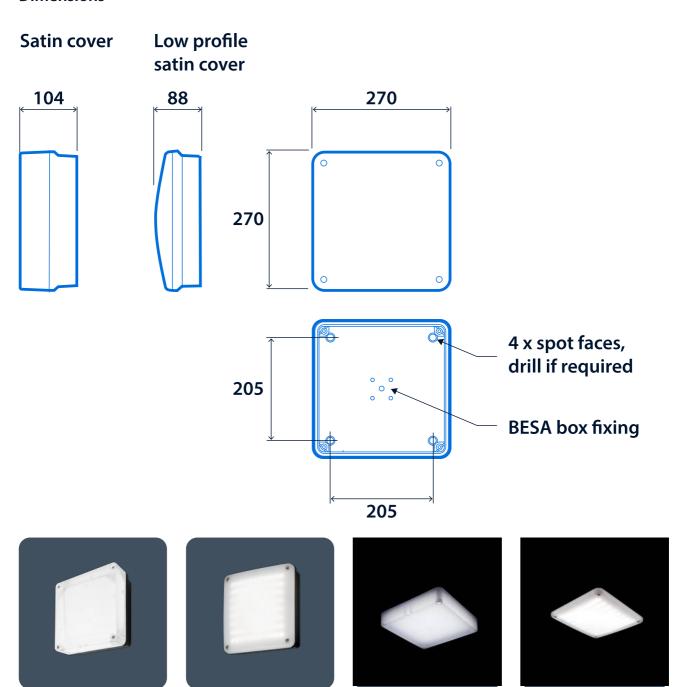

Prismalette



Click or scan here

View Prismalette variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.