

Low light level, wall mounted luminaires

Stylish IP66 wall mounted luminaires. Strong high-pressure die-cast aluminium body with injection moulded UV stabilised polycarbonate cover.

Applications: Schools, hospitals, retail and other commercial environments. Final exit door illumination.

Complements its larger brother the Realta.

- Maintained or non-maintained emergency options
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66

IK11

68.8 LL/CW

SMARTSCAN

LUXGUARD

Specification

Mounting	Surface	IP rating	IP66
Impact rating	IK11		

Lighting

Lumen output	550 lm	Efficacy	68.8 LL/CW
--------------	--------	----------	------------

Emergency data

Emergency lumen output	210 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	6 W	Circuit power	8 W
-----------	-----	---------------	-----


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	63 K - L80/B10		


Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B		

Dimensions

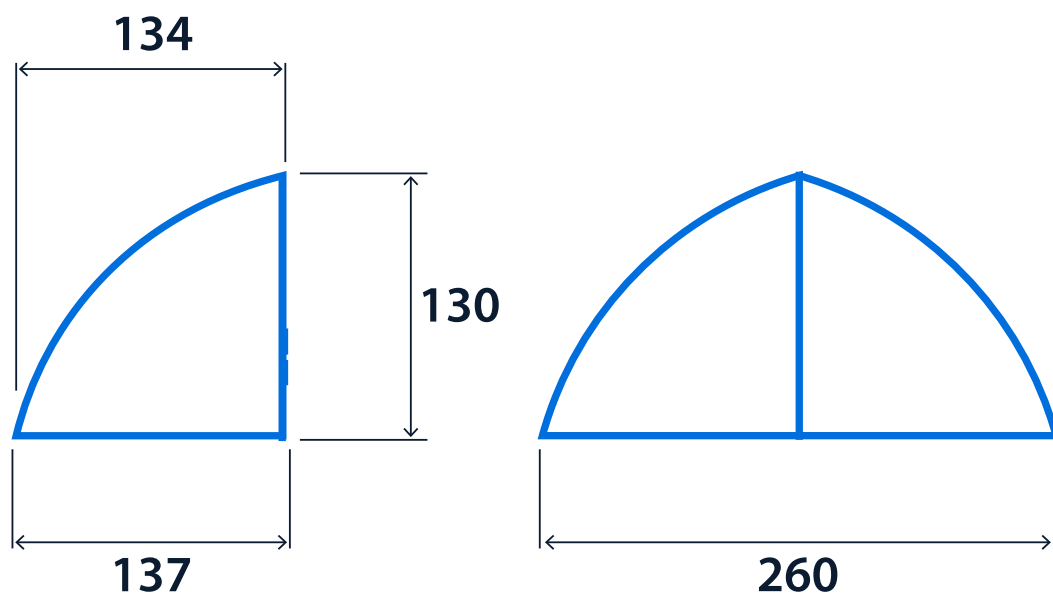

Ø 21 cable entry
(IP54 grommet supplied)

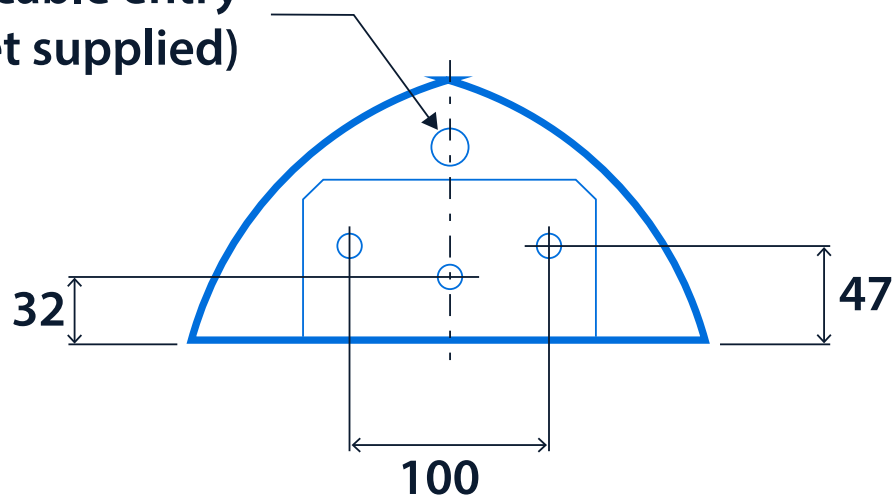



Click or scan here
View Realta Micro variants using
our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.