

Architectural surface mounted LED exit signs

Emergency exit sign luminaires with acrylic legend panel. Suitable for ceiling, wall or cantilever mounting.

Applications: commercial and retail environments.

- Low power consumption (1 W total)
- Extremely long LED lifetime, up to 100,000 hours
- Very easy battery compartment access
- Ceiling mounted with optional kits for wall and cantilever mounting
- 26 m maximum viewing distance in accordance with BS EN 1838
- Choice of legends
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology



IP20



Specification

Mounting	Surface	IP rating	IP20
----------	---------	-----------	------

Emergency data

Legend type	EURO arrow down EURO arrow left EURO arrow left / right double sided EURO arrow right ISO 7010 arrow down ISO 7010 arrow left ISO 7010 arrow left / right double sided ISO 7010 arrow right ISO 7010 arrow up	Maximum viewing distance	26 m
Emergency type	Maintained	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		

Power


LED power	4 W
-----------	-----

Compliance


UKCA	Yes	CE	Yes
------	-----	----	-----

Dimensions


Ceiling Mounting

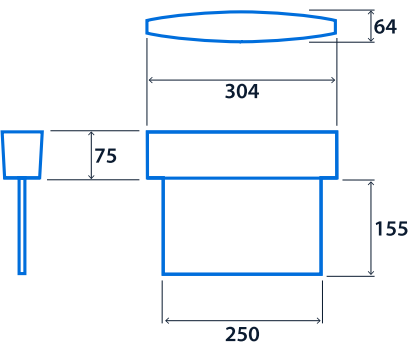

Wall Mounting

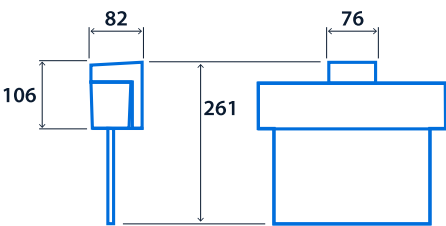

Cantilever Mounting

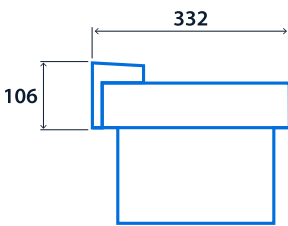

Click or scan here
View Seven variants using our
online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.