# Tau



# LED recessed luminaires for clean and sterile environments

IP65 sealed LED luminaire that satisfies the requirements of FS209D  $\,$ class 1000 and ISO14644-1 class 6. The design ensures that the ceiling integrity is maintained at all times, even when the cover is removed.

Applications: Clean and sterile environments, pharmacies, hospitals, laboratories, electronics, semiconductor manufacture/industry, food preparation.

- Ceiling integrity retained when cover removed
- Satisfies the requirements of FS209D class 1000, ISO14644-1 class
- Fits 24 mm exposed T-bar and plasterboard ceilings
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Other ceiling types / CRI 90 4000K LED / Low glare versions available to special order



IP65 (IP54 above ceiling)

Up to 103.2 LL/CW





### **Specification**

Mounting Recessed IP rating IP65 (IP54 above ceiling) Nominal size 600 x 600 mm Max presence detection height

1200 x 600 mm

8 m

#### Lighting

Optic Satin diffuser Lumen output 5,175 lm - 10,350 lm

Efficacy Up to 103.2 LL/CW

### **Emergency data**

310 lm - 338 lm Emergency lumen output Emergency type Maintained

**Emergency duration** 3 hours Nickel Metal Hydride (NiMH) **Battery** specification

#### **Power**

LED power 45 W - 90 W Circuit power 53 W - 106 W

### **LED** characteristics

Colour temperature 4000 K

Rated life (hours) 100 K - L80/B10

# **Tau**



# Compliance

 UKCA
 Yes
 CE
 Yes


 Energy efficiency class
 This product contains a light source of Thermoplastic rating
 TP(a)

energy efficiency class B

Cleanroom classifications FS209D class 1,000

ISO 14644-1 class 6

# **Dimensions**

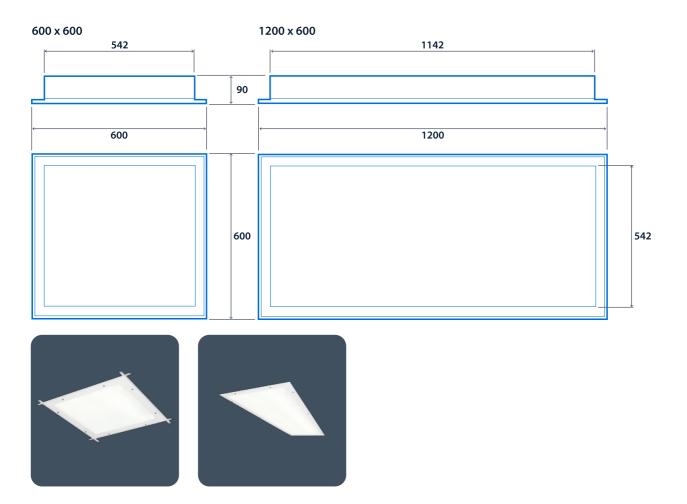

# Click or scan here

View Tau variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.