### **Thorlux Light Line Integra**



# Suspended direct/indirect LED luminaires with ancilliary cable channel

The Thorlux Light Line Integra is an extension to the extremely successful suspended direct/indirect Thorlux Light Line range.

The Integra, designed as an all-in-one lighting and cable trunking solution features one earth shielded cable channel either side of the luminaire allowing on site fitment of wiring for ancillary equipment such as integrated fire detection, public address systems and telecommunications/IT cabling.

The infill sections for the Integra range feature optional 8 W Mina-S LED spotlights.

Applications: Schools, offices.

- Direct/indirect illumination
- Continuously mounted using link kits
- Supplied fully assembled
- Supplied with easily adjustable wire suspensions
- Fitted with plug and socket connections

Notes: Acoustic attenuation wings are only suitable for use with systems using infill sections





Specification			
Mounting	Suspended	IP rating	IP20
Max presence detection height	8 m		
Lighting			
Lumen output	4,015 lm - 6,485 lm	Efficacy	Up to 143.4 LL/CW
Emergency data			
Emergency lumen output	370 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)
Power			
LED power	24 W - 42 W	Circuit power	28 W - 48 W
LED characteristics			
CRI	80+	Colour temperature	4000 K
Rated life (hours)	90 K - L80/B10		

## **Thorlux Light Line Integra**




Compliance

UKCA Yes CE Yes

Energy efficiency class This product contains a light source of


energy efficiency class A

#### **Dimensions**

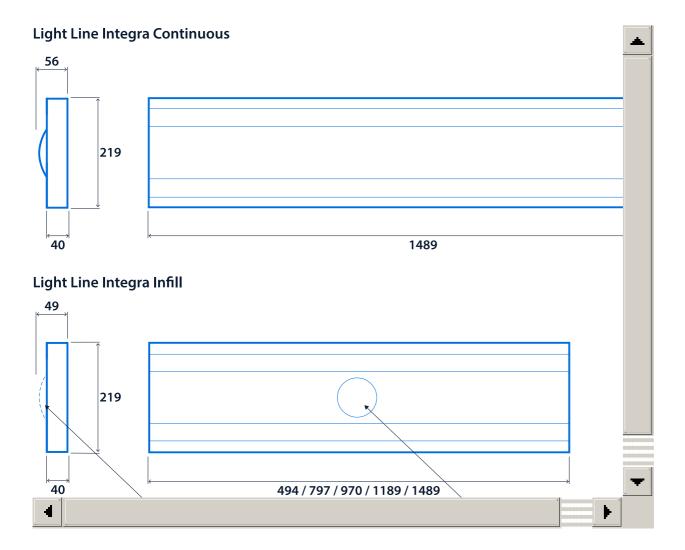

## **Thorlux Light Line Integra**



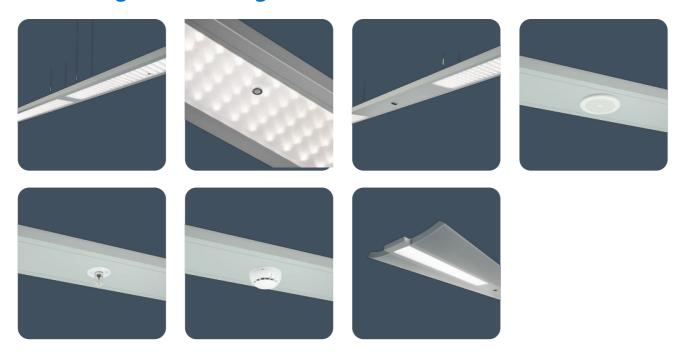

### Click or scan here

View Thorlux Light Line Integra variants using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.