

Hazardous area LED emergency bulkhead luminaires

IP65 sealed self-test emergency LED luminaires for non-maintained use, legend kit available to identify escape routes.

Applications: Zone 2 & 22 areas.

- Suitable for use in areas classified as low impact risk
- Optional directional self-adhesive legends
- Nickel metal hydride rechargeable battery
- Three hour self-test emergency operation
- Suitable for ambient temperatures of 0°C to +40°C



IP65

25 LL/CW

Specification

Mounting	Surface	IP rating	IP65
----------	---------	-----------	------

Lighting

Optic	Opal cover	Lumen output	100 lm
Efficacy	25 LL/CW		

Emergency data

Emergency lumen output	150 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	3 W	Circuit power	4 W
-----------	-----	---------------	-----

LED characteristics



CRI	70+	Colour temperature	6500 K
Rated life (hours)	50 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
Hazardous compliance	II 3 D Ex tc IIIC T60-80°C Dc II 3 G Ex nR IIC T4 Gc	ATEX certified	Yes

Three-65 Type 'n'

Dimensions

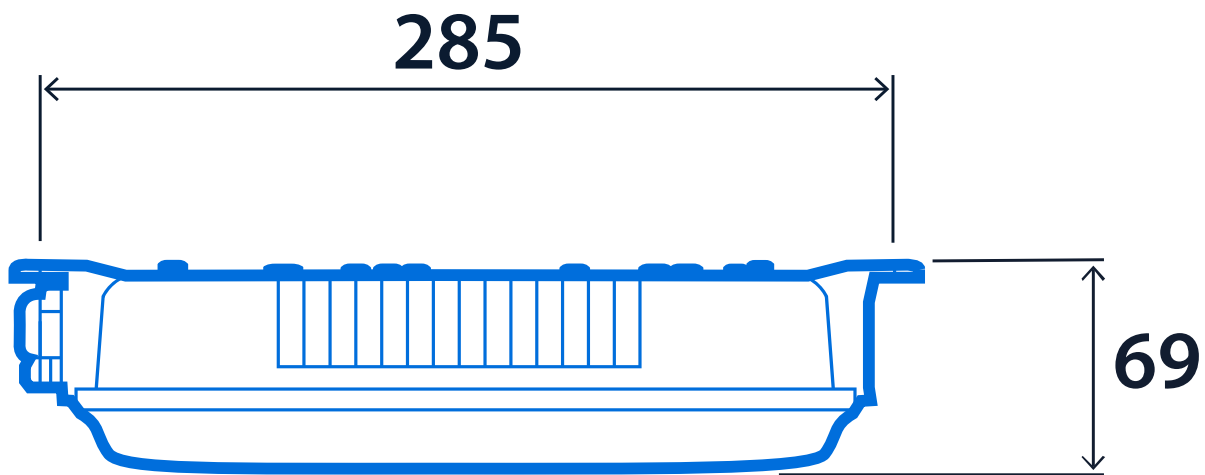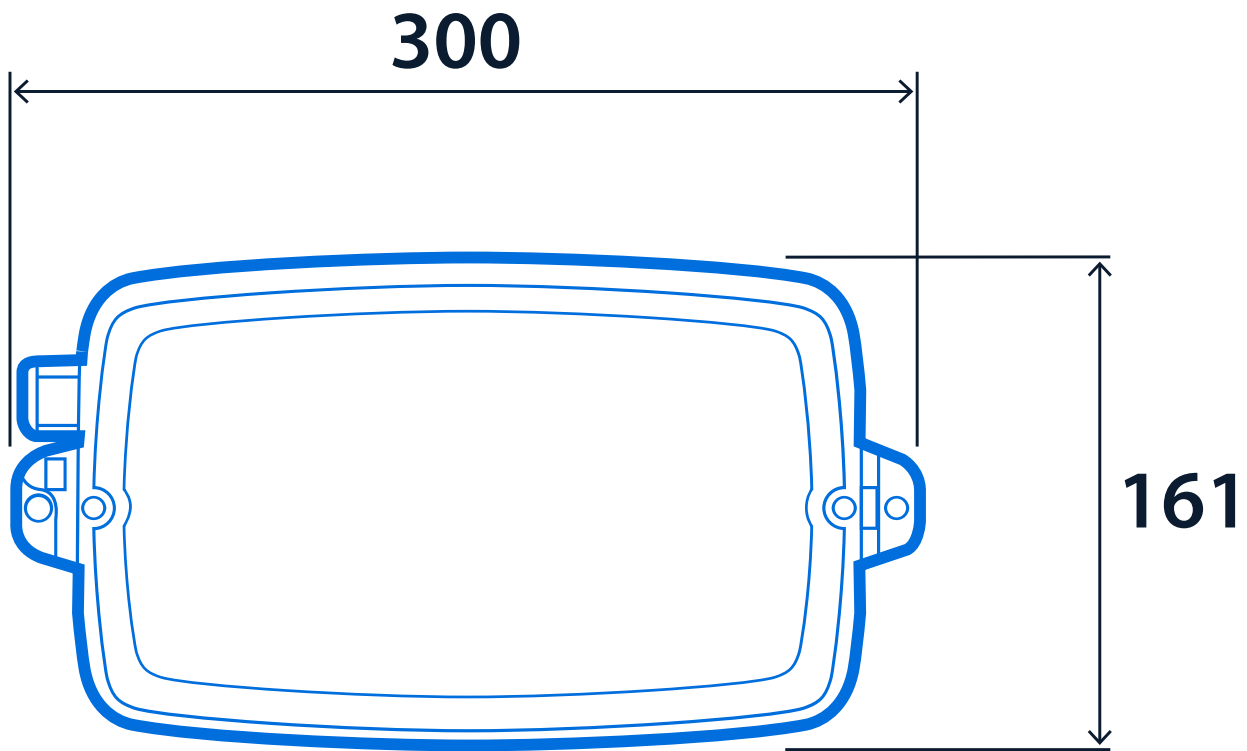



Click or scan here
View Three-65 Type 'n' variants
using our online filtering tool



Information is correct as of 29 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.